

Applications


- All Process Fired Heaters such as
 - Crude and Vacuum Distillation Unit
 - Delayed Coker
 - Hydrocracker and Hydrotreater
 - Platformer

Design Requirements

- Wide operational envelope
- Able to handle a multitude of fuels
- Flexible design considerations
- API specification compliant
- Robust for long through life cost

Standard Supply

- **Windbox** - 3 or 5 mm carbon steel insulated with 50mm mineral wool fully retained with perforated plate / expanded metal
- **Damper** - integral with the windbox and fully lockable, with external position indicator in any position. Can be designed to operate from grade for any heater height
- **Single Burner Tile** - high grade low cement castable with identical pieces that can be installed in any position
- **Gas Sprayer Carriage** - fully welded construction with single gas inlet. All gas lances can be designed to be individually removable using fixed or flexible piping as an option
- **Air Pressure Drop Plate** - simple design to ensure accurate pressure drop across burner throat

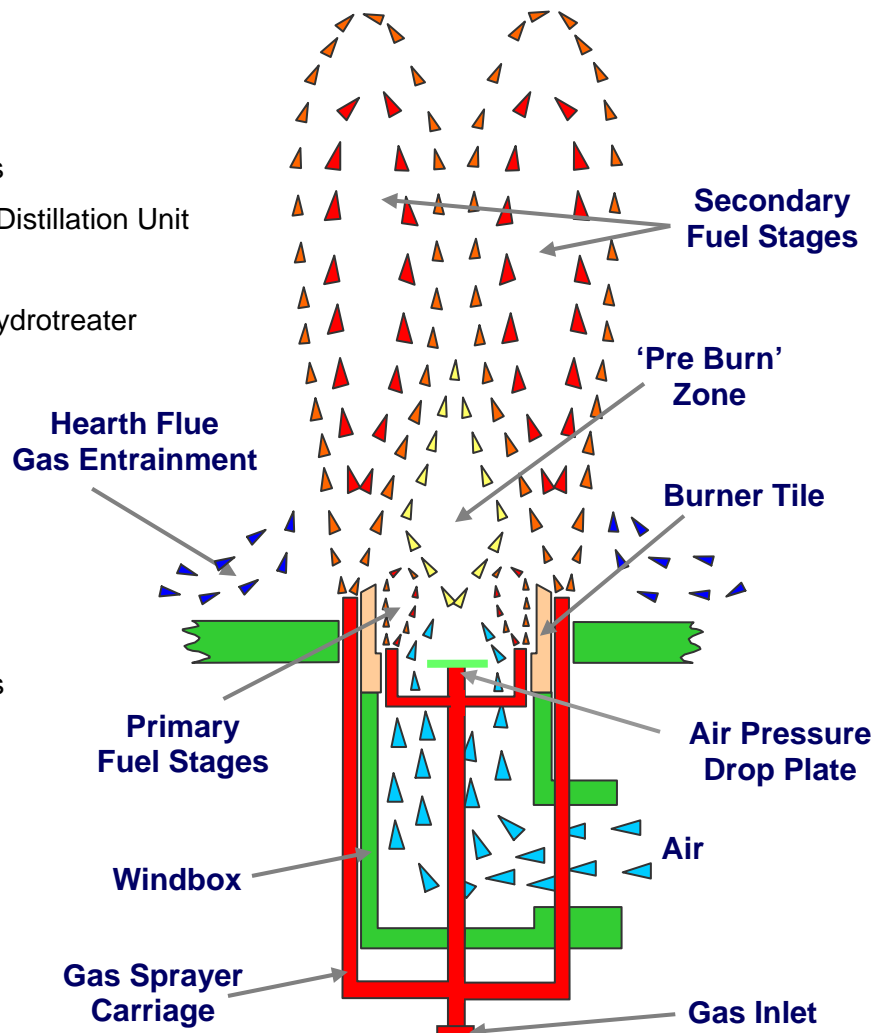

Key Features

- Staged Fuel low NOx technology with toroidal ledge to provide a high degree of stability
- Inner lances located in a low temperature zone thus minimising potential for coke formation
- Forced or Natural Draught or a combination of both
- Fixed or removal lances for ease of maintenance
- Large orifice in nozzle reduces potential for “tip fouling”
- Low excess air for maintaining efficient combustion
- Suitable for a variety of applications.
- Robust materials and methods of construction ensures long and reliable life
- Designed and manufactured based on latest industry standards such as API 535, API 560 and EN 746-2




Specifications

- **Liberation** 0.5 to 6.0 MW
- **Fuels** Butane, Natural gas, Hydrogen
- **Fuel Pres.** Gas 0.5 to 2.0 kg/cm²
- **Excess Air** 5 to 30 %
- **Register Draught Loss** 3 to 50 mmwc

Assumed conditions unless stated / requested

- **Furnace Temperature** 850 °C
- **Register Draught Loss** Natural Draught 10 mmwc
Forced Draught 50 mmwc
- **Combustion Air Temp** 25 °C
- **Excess Air** 10%
- **Fuels** Natural gas @ 1.5 kg/cm²
- **NOx** 90 mg/Nm³

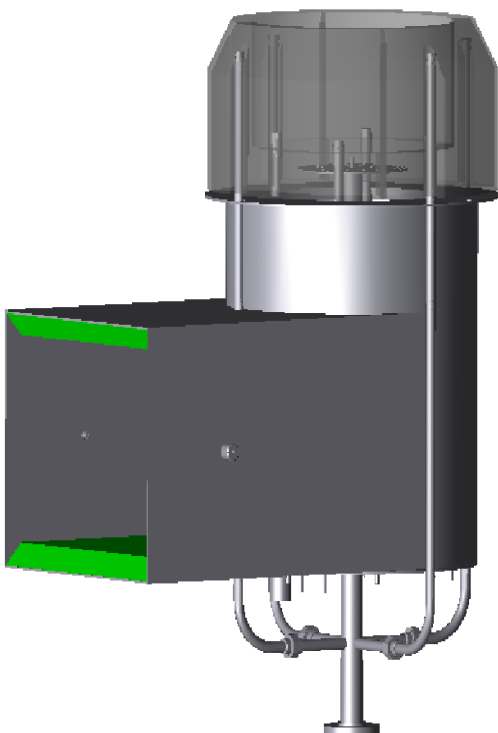

For further information on combustion equipment please contact the head office:

Hamworthy Combustion Engineering Limited
Fleets Corner
Poole Dorset BH17 0LA
Tel: +44 1202 662700
Fax: +44 1202 665333
Email: info@hamworthy-combustion.com
Website: <http://www.hamworthy-combustion.com>

©2008 Hamworthy Combustion Engineering Limited – All rights reserved

Process/Enviromix SF/July 2008/Rev. 2

Hamworthy Combustion Engineering Limited reserve the right to make changes and improvements which may necessitate alteration to the specification without prior notice


HAMWORTHY
COMBUSTION

Incorporating:

PEABODY ENGINEERING
AIROIL - FLAREGAS
CHENTRONICS